
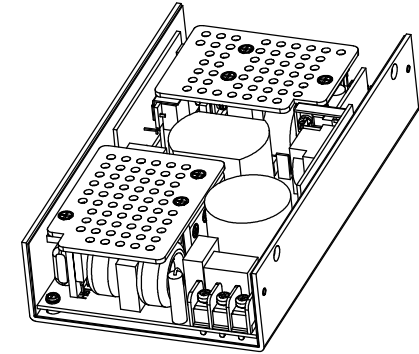
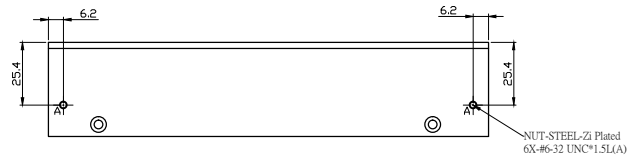


CONN.	SOURCE	VENDOR	DESCRIPTION	VENDOR P/N
INPUT	1 <sup>st</sup>	DINKLE	HOUSING 03 POS.	DT-35-B01W-03
	2 <sup>nd</sup>	EQUIV		
GND +12V	1 <sup>st</sup>	DINKLE	P-830N	
	2 <sup>nd</sup>	EQUIV		
A1	1 <sup>st</sup>	CvILux	HOUSING 06 POS.	CI0106P1VK0-LF
	2 <sup>nd</sup>	EQUIV		
A2	1 <sup>st</sup>	CvILux	HOUSING 02POS.	CI5202P1V00-LF
	2 <sup>nd</sup>	EQUIV		
A3	1 <sup>st</sup>	CvILux	HOUSING 04 POS.	CI5204P1V00-LF
	2 <sup>nd</sup>	EQUIV		
A4	1 <sup>st</sup>	CvILux	HOUSING 05 POS.	CI0105P1HK0-LF
	2 <sup>nd</sup>	EQUIV		



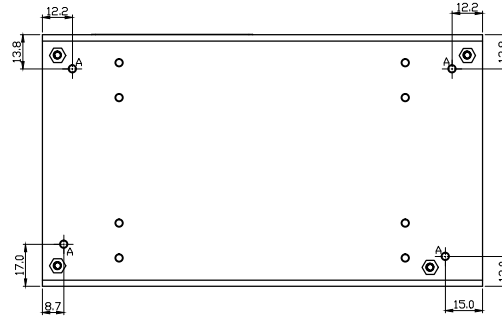


CONN.	PIN NUM	PIN NAME
A1	1	+5VSB
	2	+5VSB
	3	GND
	4	GND
	5	GND
	6	-12V

CONN.	PIN NUM	PIN NAME
A2	1	GND
	2	+24V

CONN.	PIN NUM	PIN NAME
A3	1	+3.3V
	2	+3.3V
	3	+5V
	4	+5V

CONN.	PIN NUM	PIN NAME
A4	1	DCDK
	2	PSDN
	3	AC FAIL
	4	
	5	

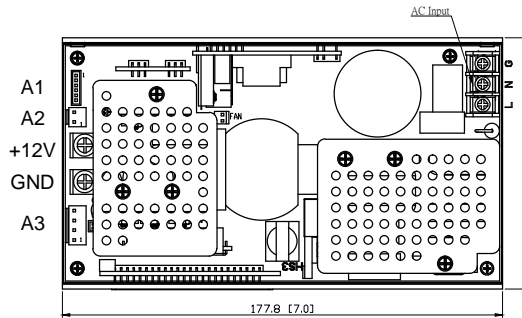

RANGE	TOL. +/-				
	NCT	TOL	OTH	PAK	WIR
0 ~ <6	0.20	0.20	0.20	1.00	2.00
6 ~ <30	0.25	0.20	0.35	1.00	3.00
30 ~ <120	0.30	0.25	0.45	2.50	5.00
120 ~ <300	0.45	0.30	0.60	3.50	8.00
300 ~ <600	0.60	0.50	0.80	4.50	10.00
600 ~ <1200	1.00	0.80	1.00	5.50	15.00
ANG. TOL.	0.5°				



Aras Power Technologies Taiwan Branch  
美商汎瑞斯電子科技(股)公司台灣分公司

Designed	Jiun Huang	DESCRIPTION:	PART NO.:	MODEL NO.:				
Draw	Jiun Huang	PSU OUTLINE	ARFU-4016M-00-0D	ARFU-4016M-00				
Approved		MATERIAL	AL(1100) T=2.0 mm	DWG NO.		REV.	01	ORIGINAL RELEASE
		FINISH		3D FILE		SHEET	1 OF 1	
						REV.		DESCRIPTION
								DATE
								APP